

126014

PFC70E/0

ELECTRIC GLASS CERAMIC BOILING TOP WITH 4 HEATING ZONES ON ELECTRICAL CONVECTION OVEN WITH 1 GRID AND 1 TRAY



- Glass ceramic electric cooker (70 cm) with 4 independent cooking zones on an electric convection oven.
- Glass ceramic cook top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit for each independent area.
- Energy regulator 0-6-infinite.
- Separated heating commands and controls per plate.
- Lights warning when the heating areas are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> ELECTRIC CONVECTION OVEN

- >> Enamelled cooking chamber (45x39.5x33.5 cm).
- >> Oven door with 2 tempered glass panes. Heat-reflecting inner glass.
- >> Removable silicone gasket.
- >> Heating via fan with heating element.
- >> Thermostatic control 0-275°C.
- >> 4 trays 440x365 mm.
- >> Timer 0-50 minutes.
- >> 1 grid and 1 tray included.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	11,1 kW	ELECTRIC POWER	11,1 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
OVEN POWER	2,5 kW	BOILING TOP POWER	8,6 kW
COOKING ZONE POWER	2x1,8 + 2x2,5 n° - kW	TRAY CAPACITY	n° 4x(440x380)
COOKING CHAMBER DIMENSIONS	46x41,5x32 cm	2-ZONE HEATING ELEMENTS	n° 2
GUIDES	n° 4	NUMBER OF COOKING ZONES	n° 4
VERTICAL DISTANCE BETWEEN TRAYS	1x8 + 2x5 cm	OVEN TEMPERATURE RANGE	0÷275 °C
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²	TIMER	0-50 min
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Convection
HEATING ZONES	n° 4	IPX RATING	4
WIDTH	70 cm	DEPTH	65 cm
HEIGHT	85 cm	PACKAGE WIDTH	76 cm
PACKAGE DEPTH	75 cm	PACKAGE HEIGHT	117 cm
NET WEIGHT	53 kg	GROSS WEIGHT	68 kg
VOLUME	0,67 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	888.0 W	SENSIBLE HEAT RELEASE	2220.0 W
STEAM RELEASE	1309.8 g/h		

ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

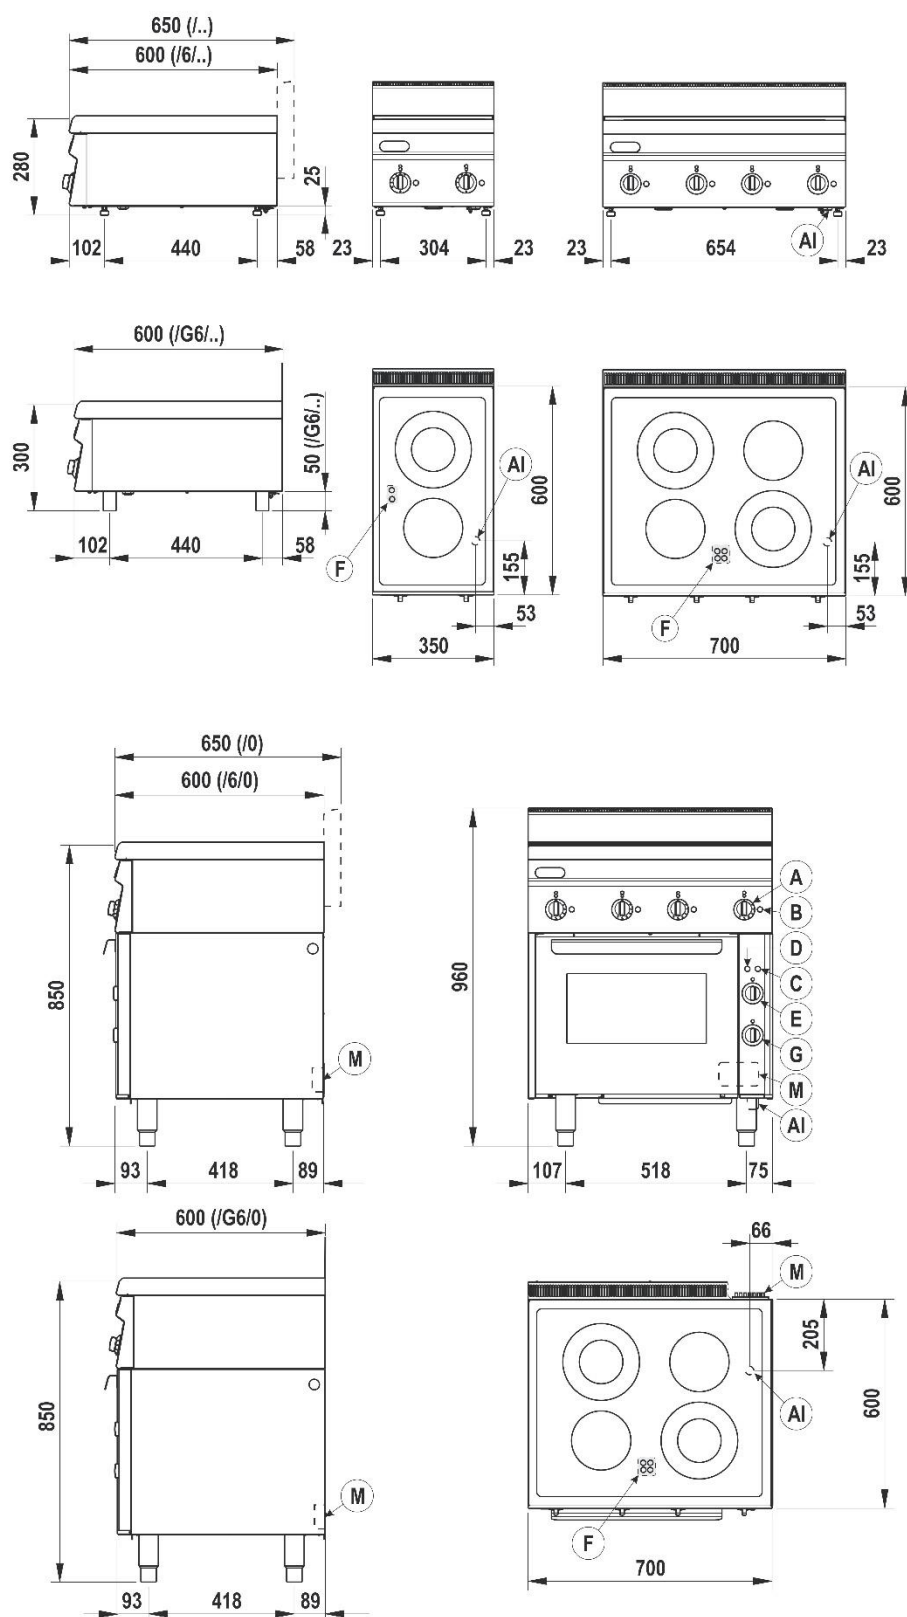


Fig.1 | Abb.1 | рис.1 - 5415.673.00