
313223

FTC12G9

GAS GRIDDLE WITH A CHROME-PLATED, SMOOTH PLATE (TOP VERSION)



- Gas griddle (120 cm), top version, with a mirror-polished chrome-plated, smooth cooking plate recommended for cooking delicate foods.
- The cooking plate recessed and hermetically welded to the worktop allows you to cook large quantities of different foods.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- Heating through 3 2-branch chrome-plated steel burners (8 kW) with 3 independent working zones.
- Operating thermostatic valve with temperature ranging between 150°C and 300°C.
- Safety thermostat.
- Scraper included.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Ignition through a piezoelectric device with a water protection cap.
- Pilot burner and safety thermocouple.
- Sloped Inclined cooking plate (15 mm thick) to drain grease and liquids.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Removable splashback on 3 sides and cap included.
- Technical compartment for easy connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	24 kW	GAS POWER	24 kW
TEMPERATURE RANGE	60÷300 °C	NATURAL GAS CONSUMPTION	2,55 m³/h
LPG CONSUMPTION	1.89 kg/h	COOKING SURFACE	113x69 cm
PLATE TYPE	Chrome-plated - smooth	HEATING ZONES	n° 3
CE GAS CERTIFICATE NUMBER	CE-0085BO0093	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	35 mm	GAS CONNECTION HEIGHT (X)	1166 mm
GAS CONNECTION HEIGHT (Y)	-75 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	WIDTH	120 cm
DEPTH	90 cm	HEIGHT	28 cm
PACKAGE WIDTH	127 cm	PACKAGE DEPTH	101 cm
PACKAGE HEIGHT	65 cm	NET WEIGHT	166 kg
GROSS WEIGHT	181 kg	VOLUME	0,83 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	9600.0 W
SENSIBLE HEAT RELEASE	8400.0 W	STEAM RELEASE	14112.0 g/h

ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - SPARE BLADE KIT (10 PCS)
319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
319009	REAR COVERING PANEL FOR CABINET (L=40CM)
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

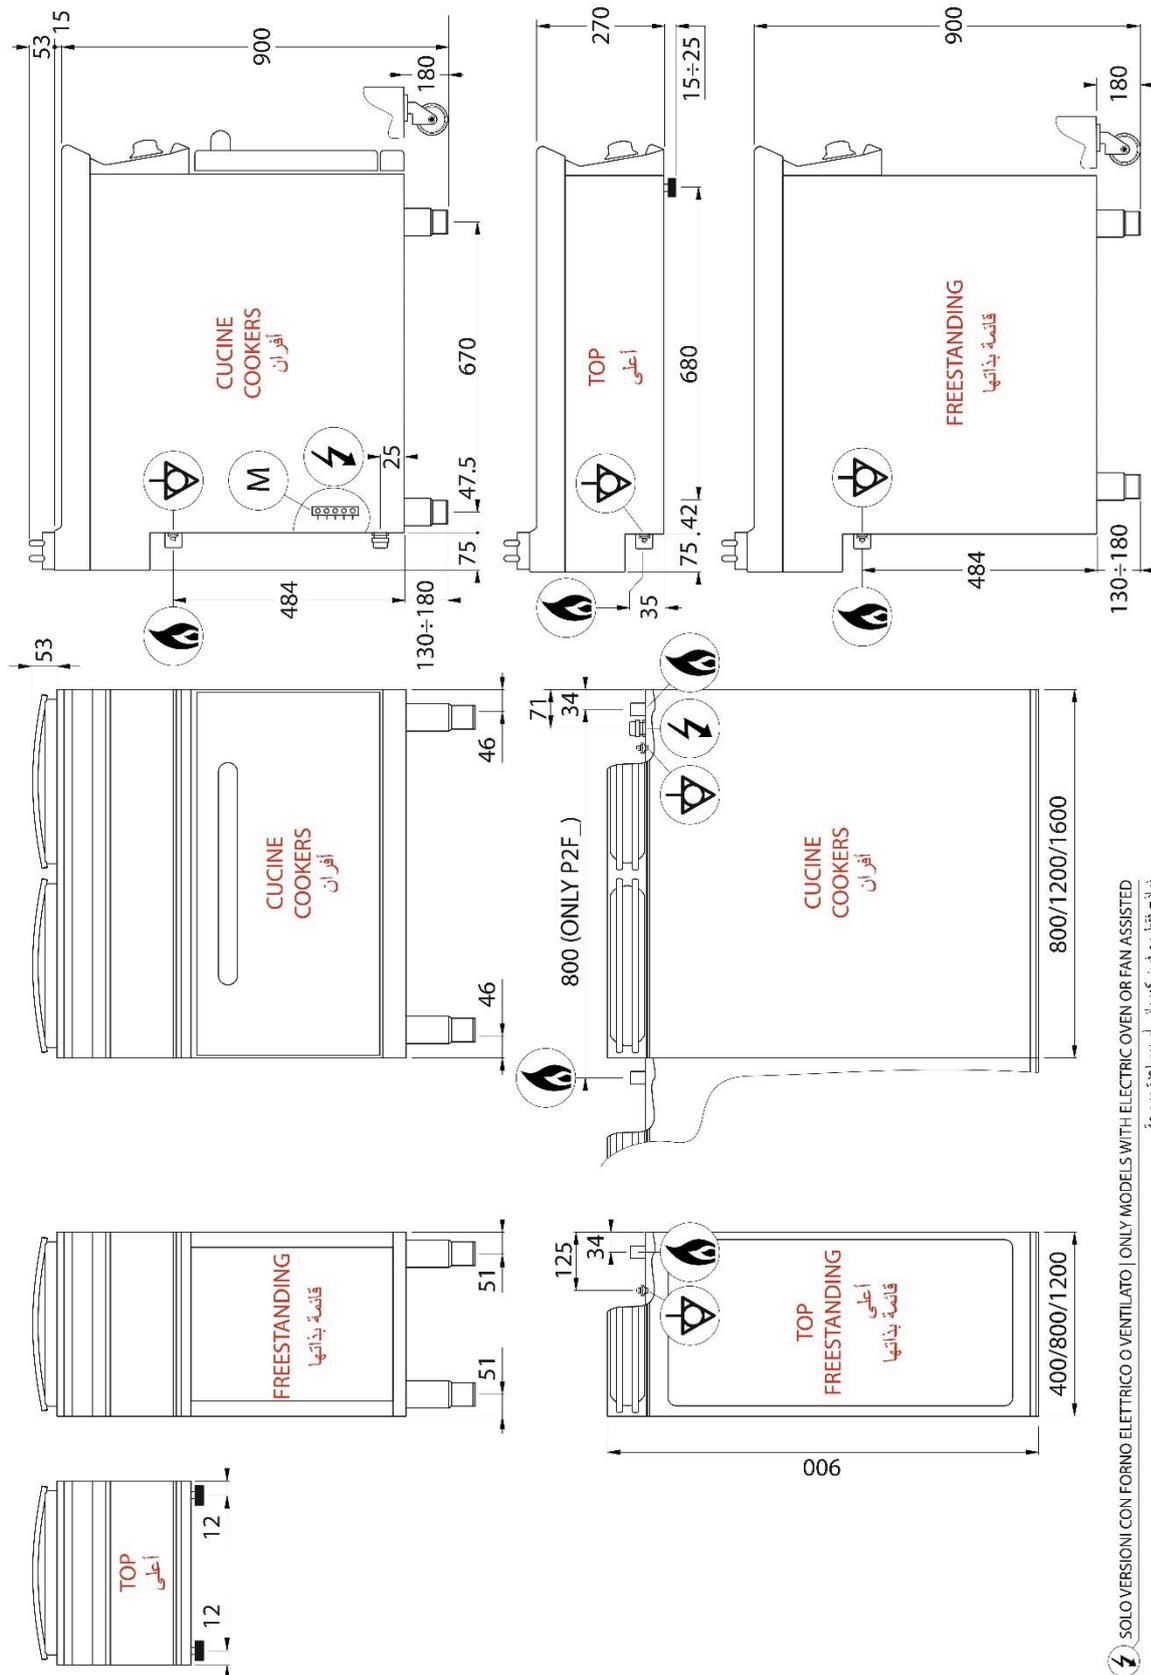


Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة