


313270

PCH8FG9

4-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRIDS FREESTANDING ON OPEN CABINET



- Freestanding 4-burner gas boiling top on an open cabinet (80 cm).
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring 6kW and 10kW.
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	32 kW	GAS POWER	32 kW
OPEN BURNER POWER	2X6 + 2X10 n° - kW	BOILING TOP POWER	32 kW
NATURAL GAS CONSUMPTION	3,39 m³/h	LPG CONSUMPTION	2.52 kg/h
CABINET DIMENSIONS	77x76,1x39,5 cm	NUMBER OF BURNERS	n° 4
BOILING PAN SUPPORT	RAAF enamelled cast iron	CE GAS CERTIFICATE NUMBER	CE-0085BQ0326
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	484 mm
GAS CONNECTION HEIGHT (X)	766 mm	GAS CONNECTION HEIGHT (Y)	-75 mm
FOOT HEIGHT	133 mm	FOOT ADJUSTMENT	133/195 mm
WIDTH	80 cm	DEPTH	90 cm
HEIGHT	90 cm	PACKAGE WIDTH	86 cm
PACKAGE DEPTH	100 cm	PACKAGE HEIGHT	116 cm
NET WEIGHT	97 kg	GROSS WEIGHT	111 kg
VOLUME	1 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	3840.0 W	SENSIBLE HEAT RELEASE	9600.0 W
STEAM RELEASE	5632.0 g/h		

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
319010	REAR COVERING PANEL FOR CABINET (L=80CM)
319067	10KW HERMETIC FLAME SPREADER
319068	HERMETIC FLAME SPREADER (5 - 6 - 7 KW)
399516	ADJUSTABLE WATER TAP
399530	SIDE COVERING PANEL FOR A 1-MODULE CABINET
399538	PAN SUPPORT REDUCER
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

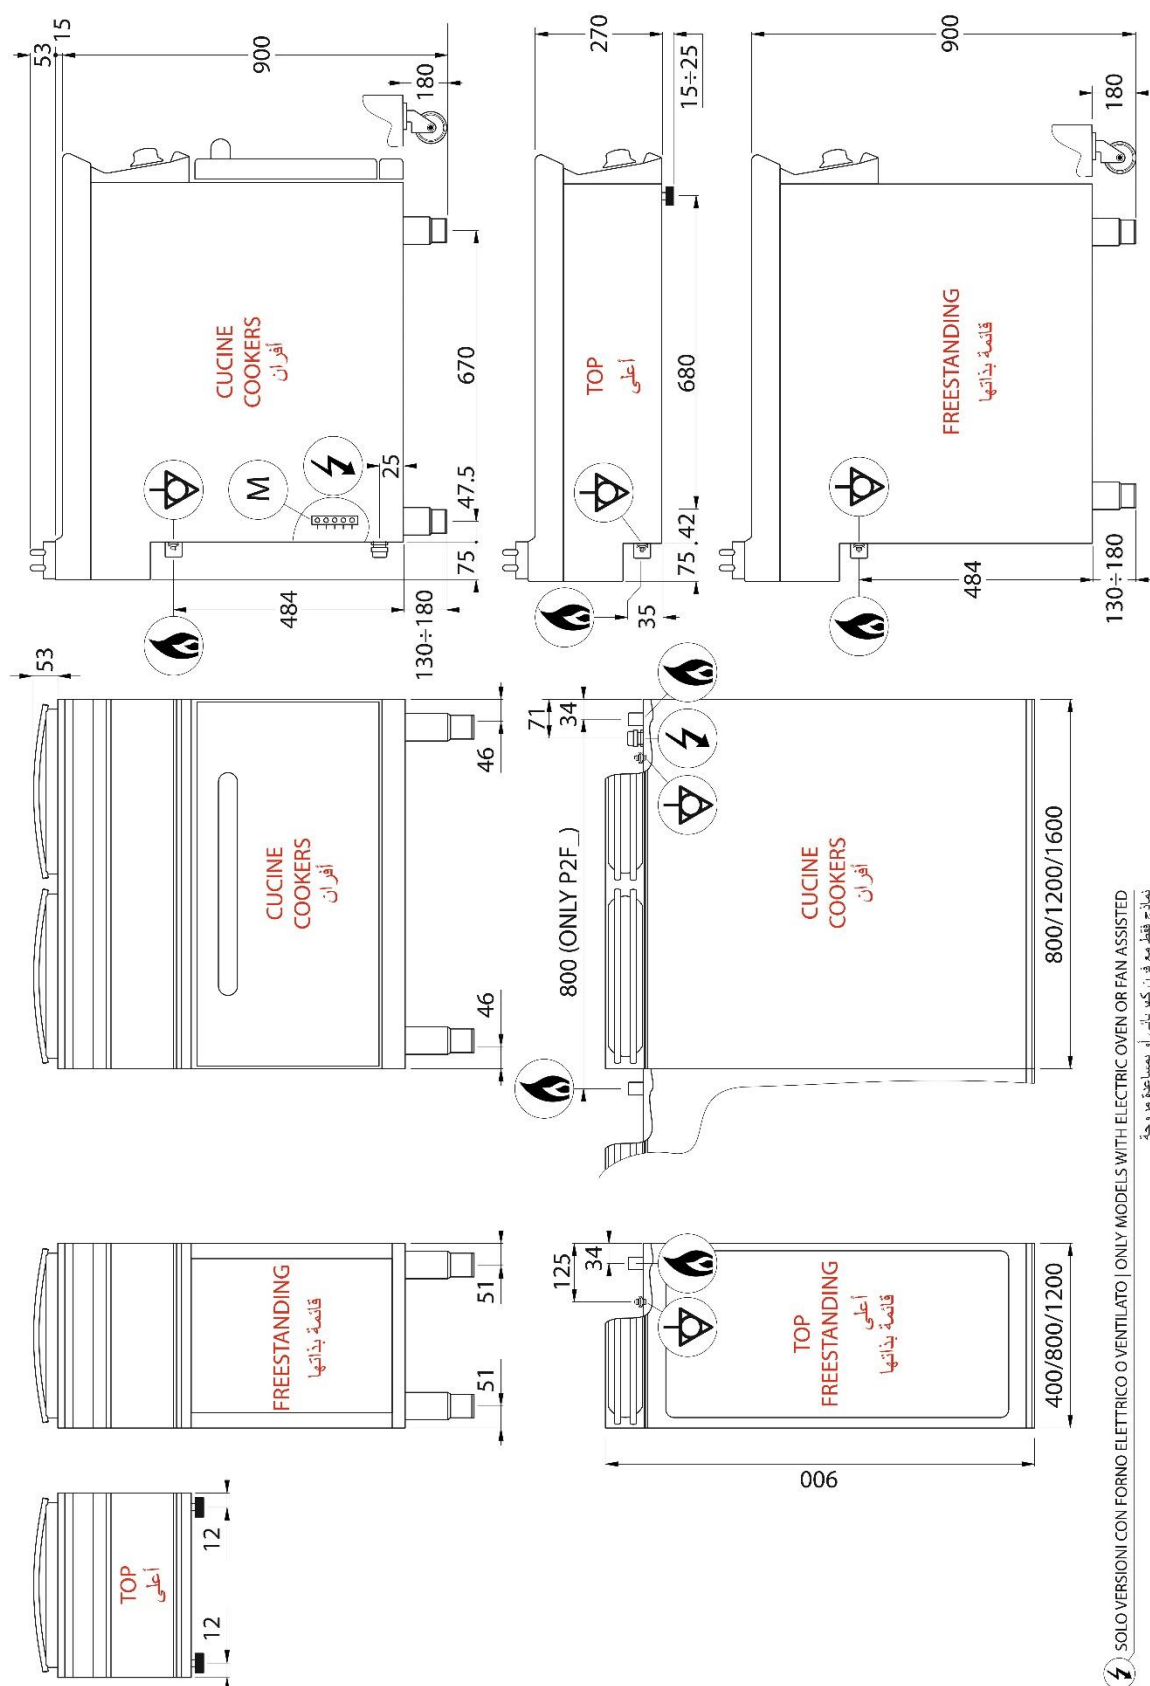


Fig.1 | Abb.1 | рис.1 | ١ | الصورة رقم - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
نماذج فقط مع فرن كهربائي أو بمساعدة مروحة