


613006

PPC70G7

GAS SOLID TOP BOILING TOP (TOP VERSION)



- Gas solid top, top version (70 cm).
- Non-deformable cast iron plate (1 cm thick).
- Cast iron central burner (9 kW) to reach a temperature of 400°C at the plate centre, with pilot burner and safety thermocouple.
- Piezoelectric ignition.
- Valved gas cock.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- Gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.



TECHNICAL DATA

TOTAL POWER	9 kW	GAS POWER	9 kW
BOILING TOP POWER	9 kW	GAS PLATE POWER	1x9 n°- kW
NATURAL GAS CONSUMPTION	0,95 m³/h	LPG CONSUMPTION	0.71 kg/h
ELECTRIC PLATE DIMENSIONS	62,8x55,8 cm	NUMBER OF BURNERS	n° 1 (plate)
BOILING PAN SUPPORT	RAAF enamelled cast iron	PLATE TYPE	Cast iron
HEATING ZONES	n° 1	CE GAS CERTIFICATE NUMBER	CE-0085BO0092
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	26 mm
GAS CONNECTION HEIGHT (X)	657 mm	GAS CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	25 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	77,0 cm	PACKAGE DEPTH	81,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	66,0000 kg
GROSS WEIGHT	74,0000 kg	VOLUME	0,3300 m³
HARMONISED CODE	84198180		

ACCESSORIES

220585 JOINT

INSTALLATION SCHEMES

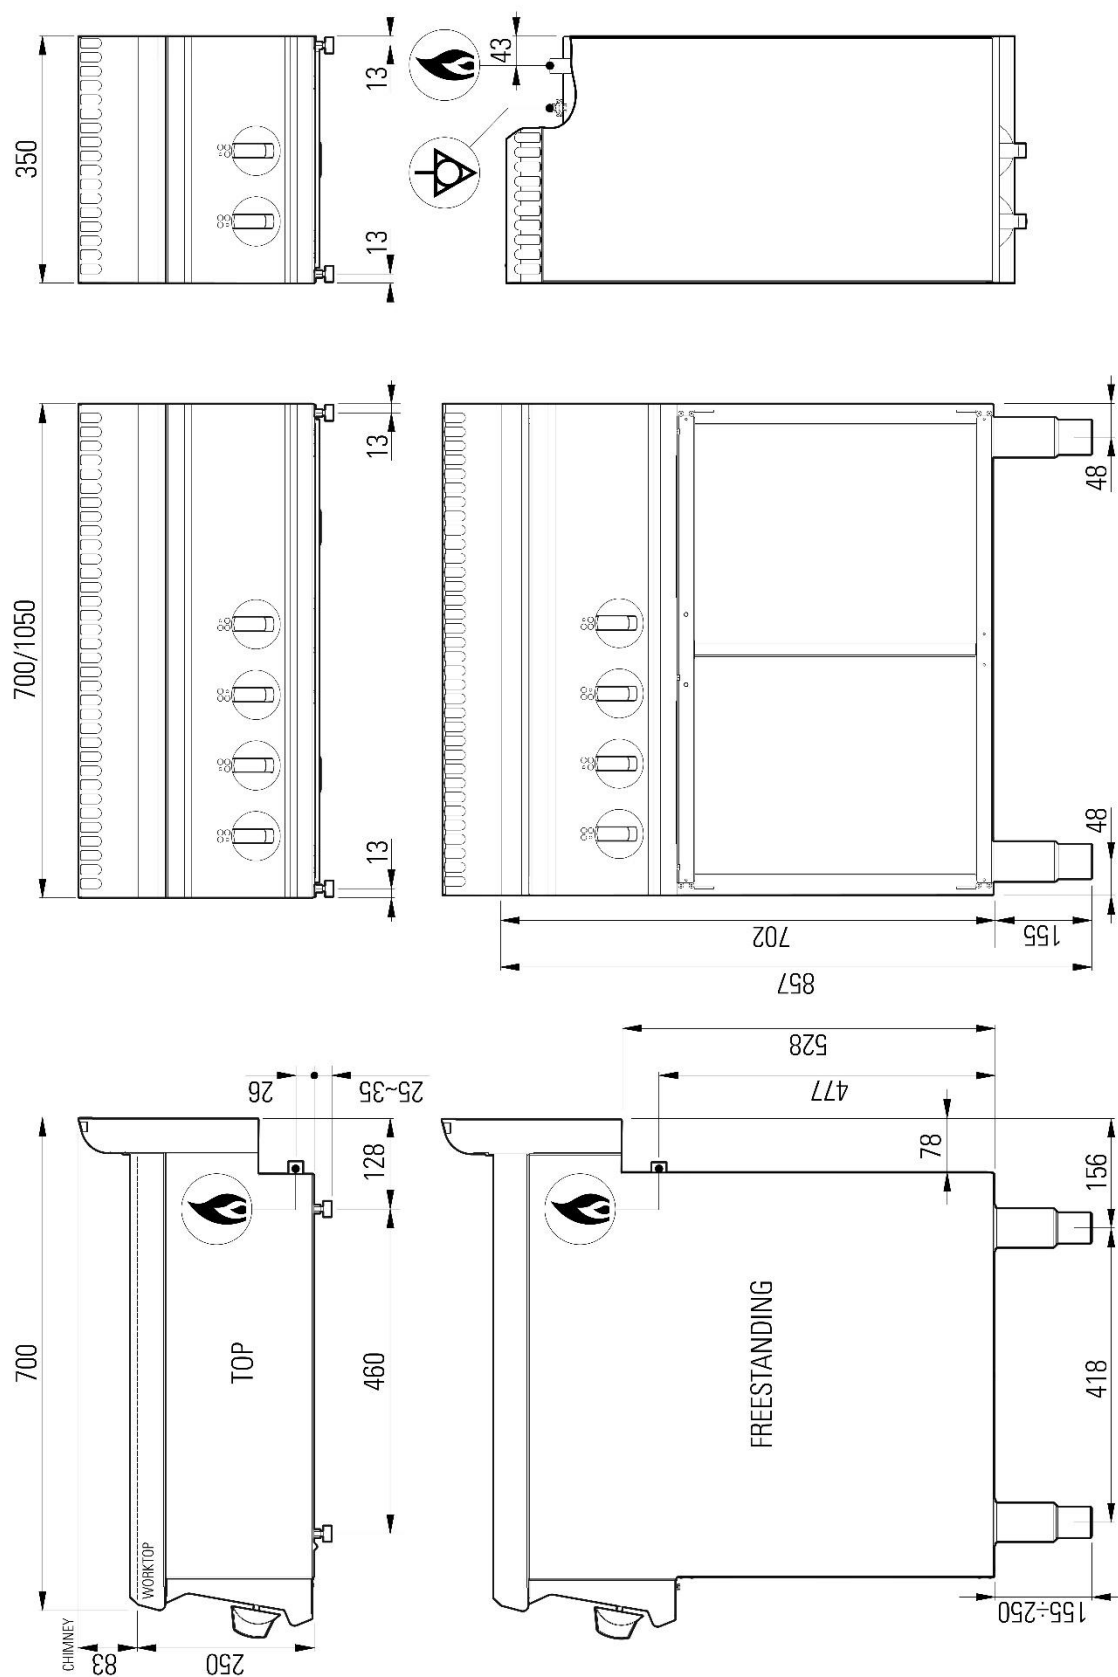


Fig.1 | Abb.1 | рис.1 - 5415.550.00