

713196

PCH4FG7

**FREESTANDING 2-BURNER HERMETIC GAS
BOILING TOP WITH CAST IRON GRID ON OPEN
CABINET**



- Freestanding 2-burner gas boiling top (40 cm) on an open cabinet.
- High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via always-on pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	12,5 kW	GAS POWER	12,5 kW
OPEN BURNER POWER	1x5 + 1x7,5 n°- kW	BOILING TOP POWER	12,5 kW
COOKING ZONE POWER	- n°- kW	NATURAL GAS CONSUMPTION	1,32 m³/h
LPG CONSUMPTION	0.99 kg/h	CABINET DIMENSIONS	33x57,4x39,5 cm
NUMBER OF BURNERS	n° 2	BOILING PAN SUPPORT	RAAF enamelled cast iron
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	660 mm
GAS CONNECTION HEIGHT (X)	366 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	81 cm
PACKAGE DEPTH	47 cm	PACKAGE HEIGHT	115 cm
NET WEIGHT	32,5 kg	GROSS WEIGHT	45,5 kg
VOLUME	0,44 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1500.0 W	SENSIBLE HEAT RELEASE	3750.0 W
STEAM RELEASE	2200.0 g/h		

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES

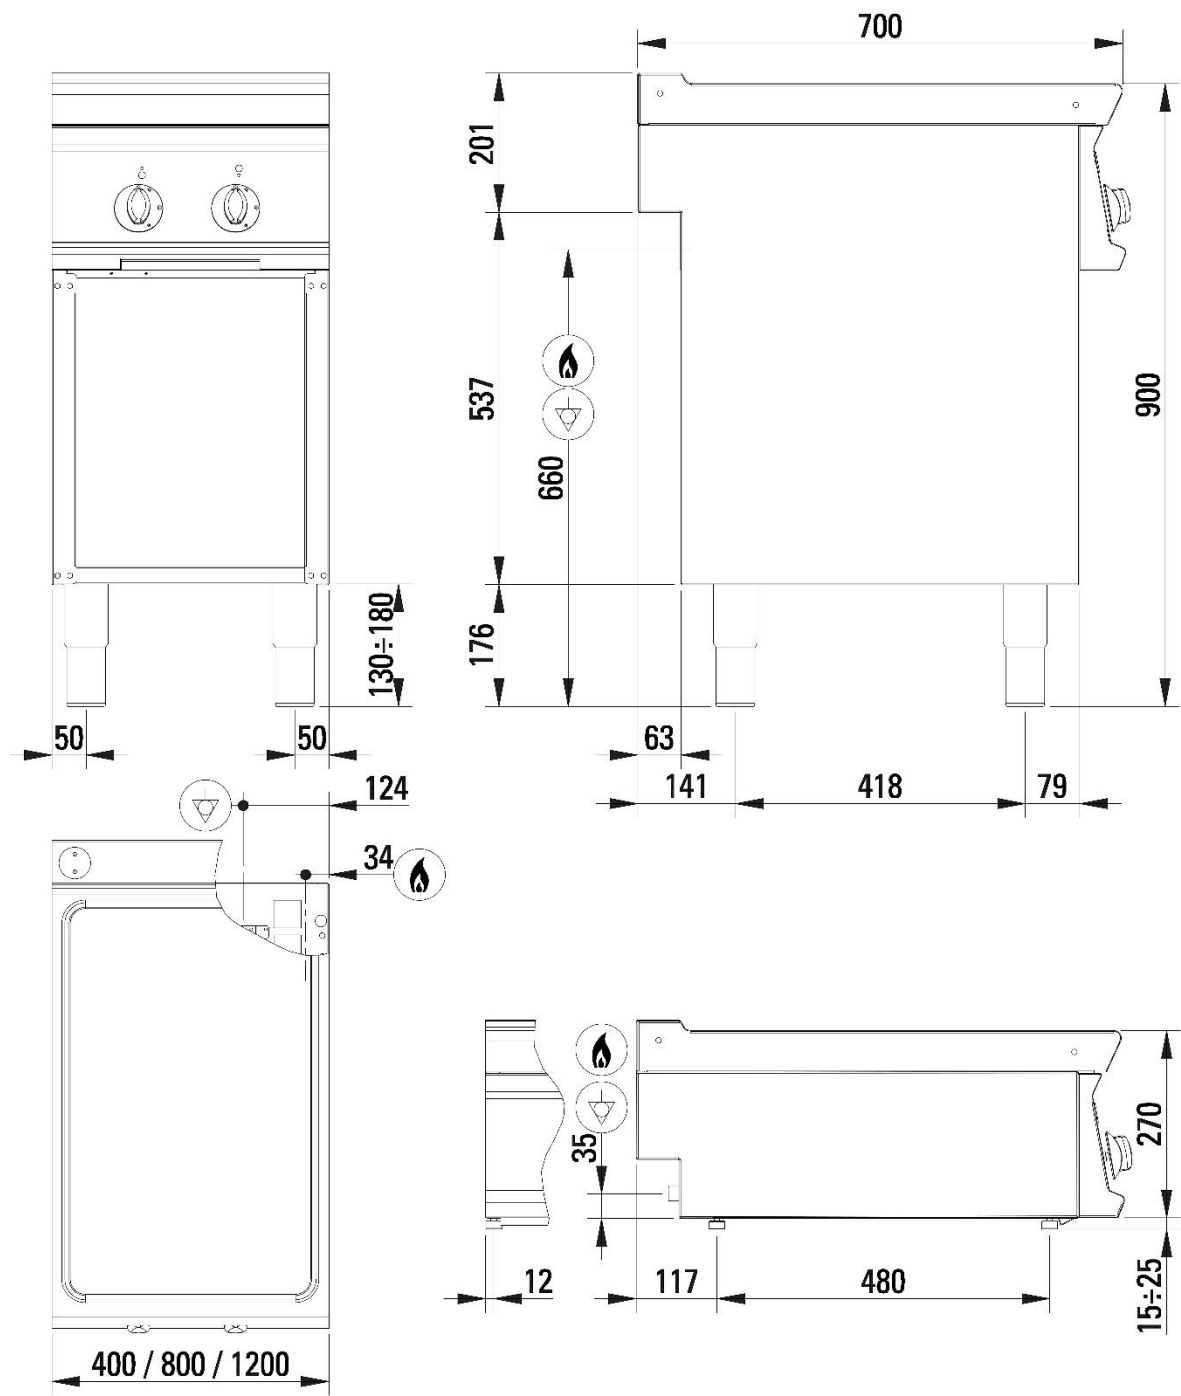


Fig.1 | Abb.1 | рис.1 - 5415.649.00