


---

**716167****PIN8E7N****4-ZONE INDUCTION BOILING TOP (TOP VERSION)**

---



- Induction boiling top (80 cm) with 4 independent cooking zones.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other boiling top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction cookware with a base diameter ranging between 12 cm and 28 cm.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.



TECHNICAL DATA

TOTAL POWER	14 kW	ELECTRIC POWER	14 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	4x3,5 n°- kW	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	4 x 2,5 n° - mm²	ELECTRIC CABLE TYPE	H07 RN-F
MAXIMUM RELATIVE AIR HUMIDITY	30-90 %	ELECTRICAL CONNECTION HEIGHT (H)	35 mm
ELECTRICAL CONNECTION HEIGHT (X)	721 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	80 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	87 cm	PACKAGE DEPTH	80 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	49,6 kg
GROSS WEIGHT	58,4 kg	VOLUME	0,37 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	392.0 W
SENSIBLE HEAT RELEASE	980.0 W	STEAM RELEASE	574.0 g/h

ACCESSORIES

799506    PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

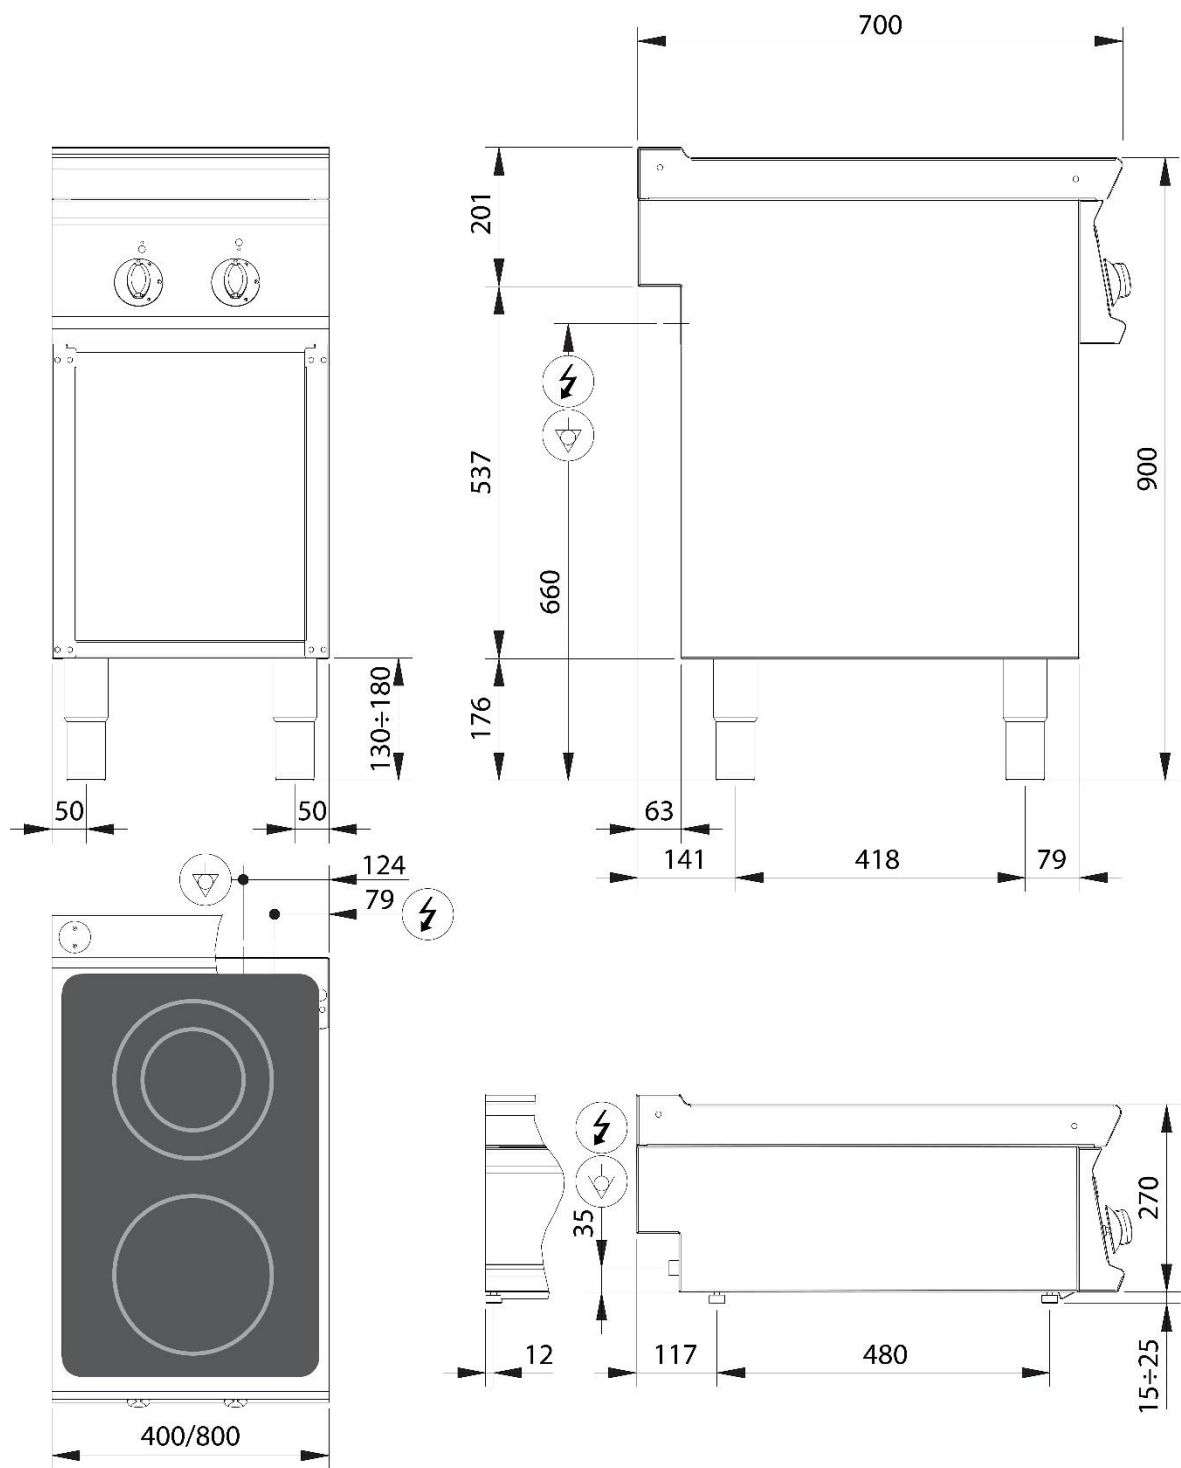


Fig.1 | Abb.1 | рис.1 - 5415.650.00