


**716169**

PIN8FE7N

**FREESTANDING 4-ZONE INDUCTION BOILING TOP  
ON OPEN CABINET**



- Freestanding induction boiling top (80 cm) with 4 independent cooking zones on an open cabinet.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other boiling top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction cookware with a base diameter ranging between 12 cm and 28 cm.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.



TECHNICAL DATA

|                                  |              |                                   |                  |
|----------------------------------|--------------|-----------------------------------|------------------|
| TOTAL POWER                      | 14 kW        | ELECTRIC POWER                    | 14 kW            |
| FREQUENCY                        | 50/60 Hz     | VOLTAGE                           | 400 3 ~ V        |
| COOKING ZONE POWER               | 4x3,5 n°- kW | CABINET DIMENSIONS                | 73x57,4x39,5 cm  |
| NUMBER OF COOKING ZONES          | n° 4         | MINIMUM POWER CABLE CROSS-SECTION | 4 x 1,5 n° - mm² |
| ELECTRIC CABLE TYPE              | H07 RN-F     | MAXIMUM RELATIVE AIR HUMIDITY     | 30-90 %          |
| ELECTRICAL CONNECTION HEIGHT (H) | 660 mm       | ELECTRICAL CONNECTION HEIGHT (X)  | 721 mm           |
| ELECTRICAL CONNECTION HEIGHT (Y) | -63 mm       | FOOT HEIGHT                       | 155 mm           |
| FOOT ADJUSTMENT                  | 155/250 mm   | IPX RATING                        | 4                |
| WIDTH                            | 80 cm        | DEPTH                             | 70 cm            |
| HEIGHT                           | 90 cm        | PACKAGE WIDTH                     | 85,0 cm          |
| PACKAGE DEPTH                    | 80 cm        | PACKAGE HEIGHT                    | 113 cm           |
| NET WEIGHT                       | 58,9 kg      | GROSS WEIGHT                      | 76,4 kg          |
| VOLUME                           | 0,7900 m³    | HARMONISED CODE                   | 84198180         |
| LATENT HEAT RELEASE              | 392.0 W      | SENSIBLE HEAT RELEASE             | 980.0 W          |
| STEAM RELEASE                    | 574.0 g/h    |                                   |                  |

ACCESSORIES

- 319002 STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
- 719005 TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)
- 799503 SIDE COVERING PANEL FOR FREESTANDING MODULE
- 799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

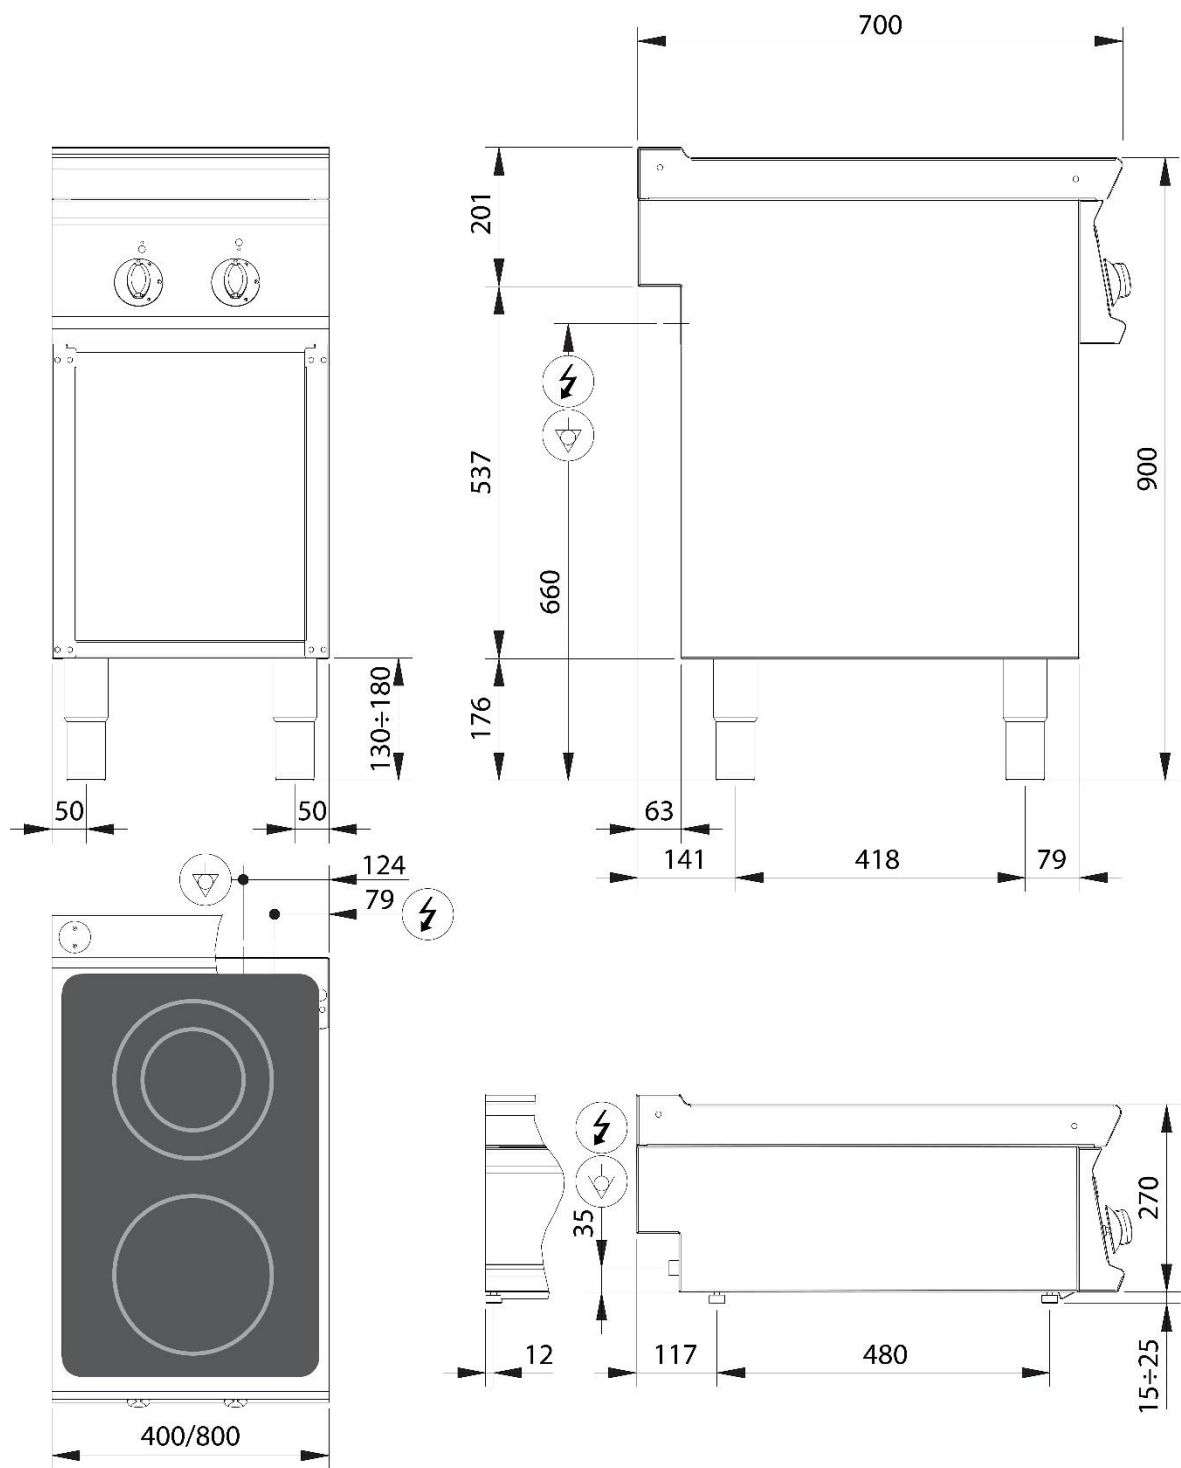


Fig.1 | Abb.1 | рис.1 - 5415.650.00