

716204

FTL12BE7

ELECTRIC GRIDDLE WITH A BRUSHED, CHROME-PLATED SMOOTH PLATE (TOP VERSION)



- Electric griddle (120 cm), top version, with a brushed chrome-plated, smooth cooking plate to cook a variety of products: from meat to fish and vegetables.
- The cooking plate, recessed and hermetically welded to the worktop, allows you to cook large quantities of different foods.
- Sloped cooking plate (15 mm thick) to facilitate the drainage of grease and liquids.
- 3 independent cooking zones.
- The anti-scratch cooking plate ensures resistance to scratches and corrosion, while the striping enhances product grilling.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- The chrome-plated surface ensures less energy consumption and heat dispersion.
- Height-adjustable (15/25 mm) rubbered plastic feet.
- Scraper included.
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.

TECHNICAL DATA

TOTAL POWER	11,7 kW	GAS POWER	- kW
ELECTRIC POWER	11,7 kW	FREQUENCY	50/60 Hz
VOLTAGE	380-415 3N~ V	TEMPERATURE RANGE	60÷270 °C
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm²	COOKING SURFACE	113x56 cm
ELECTRIC CABLE TYPE	H07 RN-F	PLATE TYPE	Brushed chrome-plated - smooth
HEATING ZONES	n° 3	ELECTRICAL CONNECTION HEIGHT (H)	35 mm
ELECTRICAL CONNECTION HEIGHT (X)	721 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	127 cm	PACKAGE DEPTH	79 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	123 kg
GROSS WEIGHT	132 kg	VOLUME	0,55 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	4680.0 W
SENSIBLE HEAT RELEASE	3861.0 W	STEAM RELEASE	6879.6 g/h

ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - SPARE BLADE KIT (10 PCS)
719040	SIDE HEAT PROTECTION DEVICE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

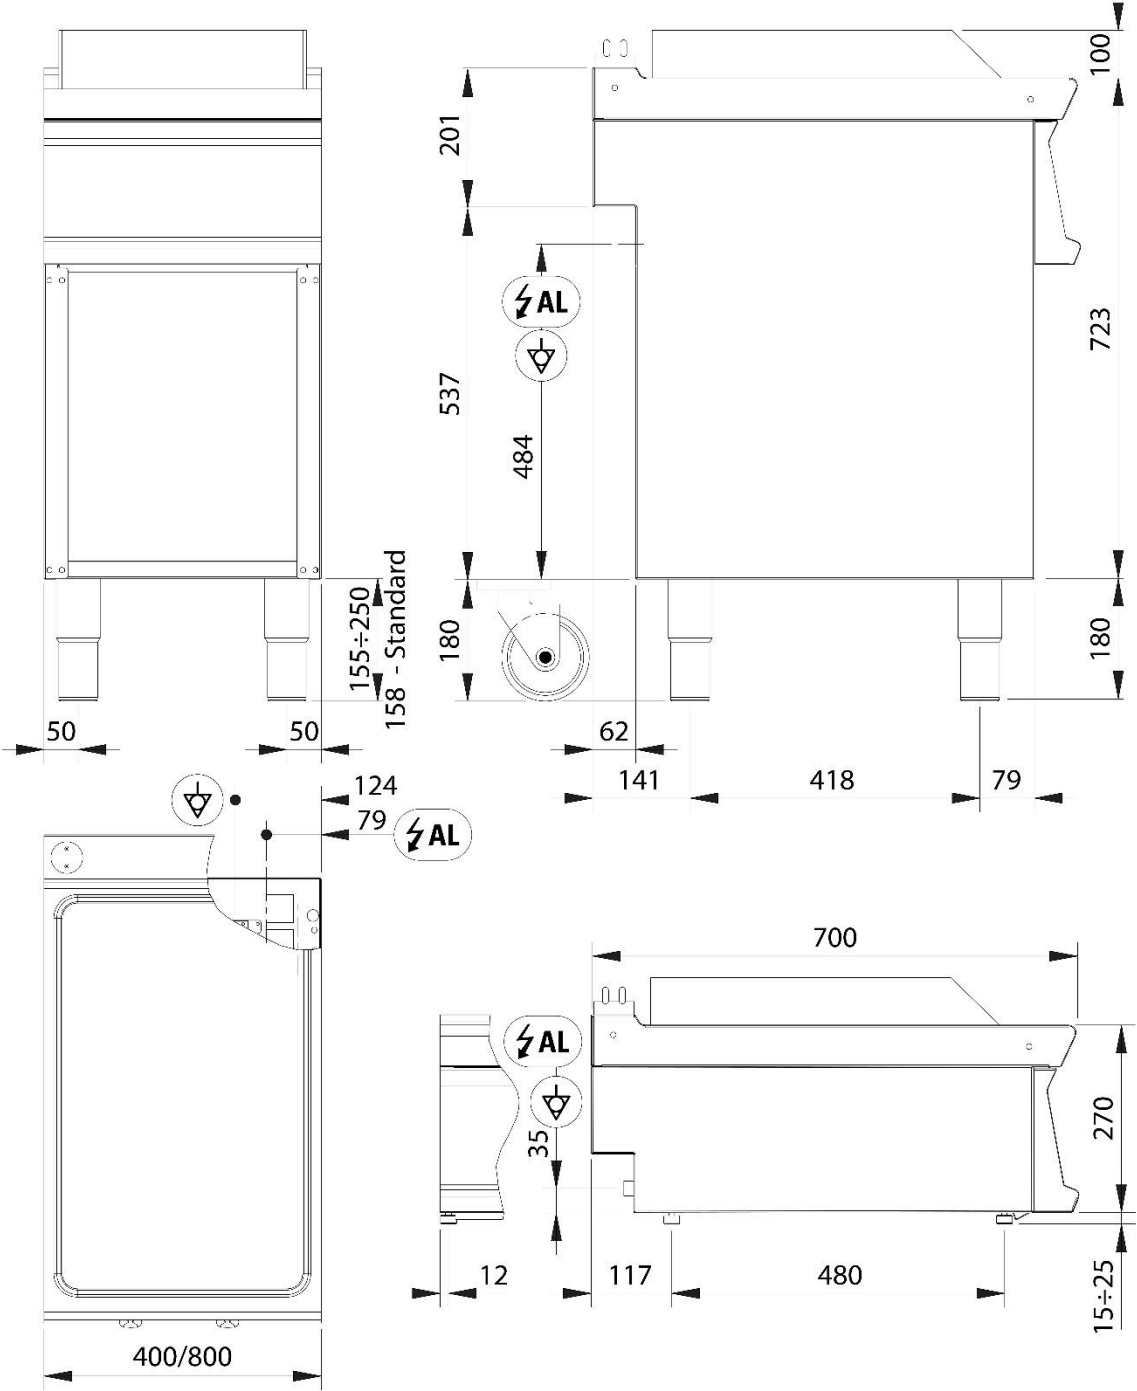


Fig.1 | Abb.1 | рис.1 - 5415.654.00